



SPECIFICATION FOR APPROVAL

CUSTOMER: Evercool USA

EVERCOOL MODEL NO: EC12025H12BP

CUSTOMER MODEL NO: EC12025H12BP

DESCRIPTION: DC12V FAN

| | |
|-------------------------------------|----------------------|
| APPROVED BY (AUTHORISED) | APPROVED |
| | Xiongwei |
| | CHECKED |
| | Guoruihua |
| | DRAWN |
| | Qiaoshenghong |
| | SALES |
| | Lisa |

* Please confirm your acceptance by return fax or mail.

| SPEC NO | ISSUE DATE | EDITION | REVISED DATE |
|----------------|-------------------|----------------|---------------------|
| 20100525004 | 2010-5-25 | A0 | 2010-5-25 |

EVERCOOL THERMAL CO., LTD

NO. 123-8, HSING DE RD., SAN-CHUNG CITY,

TAIPEI HSIEN, TAIWAN, R.O.C.

TEL: 886-2-8512-2889 FAX: 886-2-8512-2890

[URL:www.evercool.com.tw](http://www.evercool.com.tw)

[EMAIL: coolest@ms14.hinet.net](mailto:coolest@ms14.hinet.net)

I. GENERAL SPECIFICATION

| Item | Specification | |
|----------------------------|-------------------|-------------------|
| 1.Part NO. | EC12025H12BP | |
| 2.Outline Dimension | 120*120*25 | |
| 3.Rated Voltage | 12 | VDC |
| 4.Rated Current* | 0.32 | A(Max) |
| 5.Rated Power Consumption* | 3.84 | W |
| 6.Rated Speed* | Min | Max |
| | 800RPM±25% | 2200RPM±10% |
| 7.Airflow** | 33.2CFM(ft3/min) | 78.41CFM(ft3/min) |
| 8.Static Pressure** | 0.02In-H2O | 0.11In-H2O |
| 9.Noise Level*** | <17.2dB(A) | <39dB(A) |
| 10.Life Expectancy | 50000 hrs at 25°C | |
| 11.No of Polarity | 4 Poles | |
| 12.Direction of Rotation | Counter-Clockwise | |

Noted:

***Input Current Speed Power Consumption**

Measured after continuous 30 minutes

operation at rated voltage in free air

at ambient temperature of 25 °C, 65% relative humidity

****Performance**

Measured with use of double chamber. The value

are recorded when the fan speed is stabilized

at rated voltage.

*****Noise Level**

Measured at rated voltage in a semi-anechoic chamber

with background noise below than 17 dB(A).

The measuring distance is in one meter from microphone

to inlet of the fan.

II. ELECTRICAL SPECIFICATION

| Item | | Specification |
|-------------------------|-------|--|
| 1.Lock Rotor Protection | | No damage is made within 72 hours of locked rotor condition at rated voltage |
| 2.Polarity Protection | ✓ YES | Be capable of endurance when Vcc & GRD are exchanged |
| | NO | |
| 3.Auto restart | ✓ YES | Locked motor protection |
| | NO | |
| 4.Insulation Resistance | | 10MΩ/b/w unshielded wire and frame at 500 VDC/min |
| 5.Dielectric Strength | | 5Ma Max./Measured b/w lead wire and frame at 500VAC/min |

III. MAIN MATERIALS / PARTS SPECIFICATION

| Item | Specification | | | | | |
|-------------|---|---------------------------|-----|------|----|-----|
| 1.Frame | PBT E202G OR CCP PBT 4830BK UL 94V-0 | | | | | |
| 2.Impeller | | | | | | |
| 3.Bobbin | | | | | | |
| | ✓ | Dual ball bearing | | | | |
| | | 1 ball & 1 sleeve bearing | | | | |
| | | Sleeve bearing | | | | |
| | | EL bearing | | | | |
| 5.Lead wire | ✓ | Red (+) | UL# | 1007 | 28 | AWG |
| | ✓ | Black (-) | UL# | 1007 | 28 | AWG |
| | ✓ | Yellow(FG) | UL# | 1007 | 28 | AWG |
| | ✓ | Blue(PWM) | UL# | 1007 | 28 | AWG |
| 6.Connector | 2510 4P | | | | | |


IV. ENVIRONMENT SPECIFICATION

| Item | Specification |
|-------------------------|---|
| 1.Operation Temperature | -10℃~+70℃/66%(RH), high / low temperature test for 24 hours, temperature change: 30℃/hours. |
| 2.Storage Temperature | -40℃~+70℃/66%(RH), high / low temperature test for 24 hours, temperature change: 30℃/hours. |


V. DROPPING TEST

Prepared in minimum packing condition, fan will withstand one drop each on three surfaces from 30 cm height onto a 10mm thick hard wooden board.

VI. LABEL MARKING

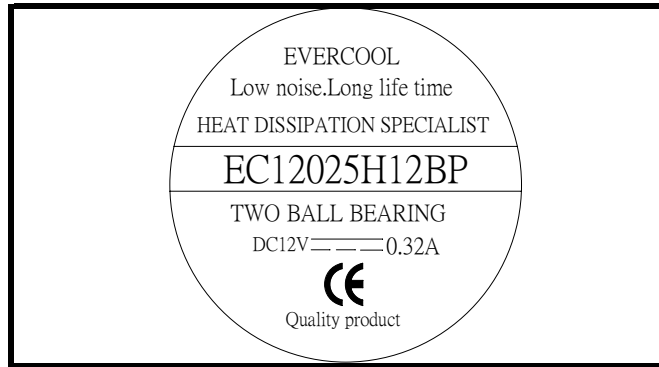


VII. OUTLINE DIMENSION

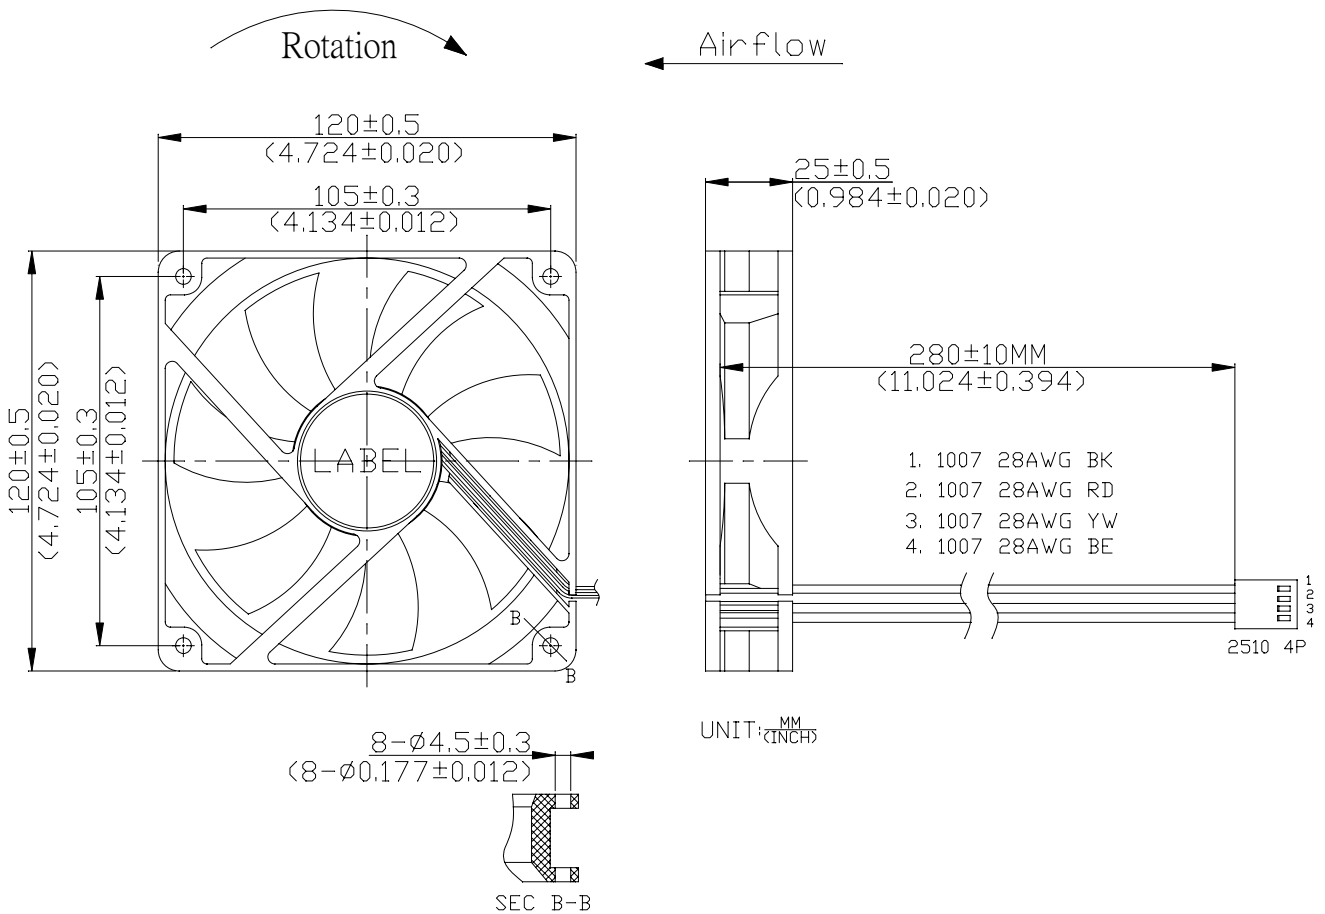

VIII.PWM CONTROL SIGNAL:

Signal Voltage Range:-0.8-20VDC.

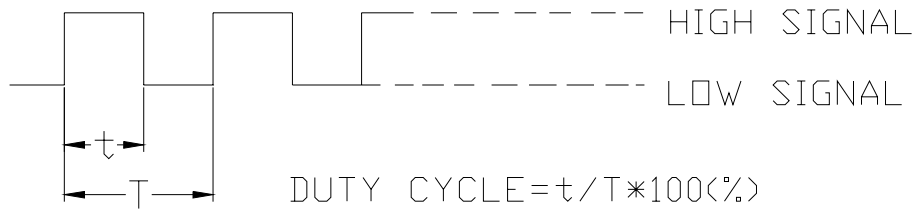

.The frequency for control signal of the fan shall be able to accept a 18KHZ-32KHZ.

The preferred operating point for the fan is 25k HZ.

.At 100% duty cycle ,The rotor will spin at maximum speed.

At 0% duty cycle, The rotor will stop spin.

At 25KHZ 20% duty cycle ,The fan will be able to star from a dead stop.

SPEED VS PWM CONTROL SIGNAL:


(AT RATED VOLTAGE & PWM FREQUENCY=25KHZ)

| DUTY CYCLE(%) | SPEED.PWM(REF) | CURRENT(A)TYP |
|---------------|----------------|---------------|
| 100 | 2200±10% | 0.32 |
| 75 | 1400±10% | 0.16 |
| 50 | 800±15% | 0.08 |
| 25 | 800±20% | 0.08 |
| 0 | 800±25% | 0.08 |

IX. Sensor Circuit System

PWM CONTROL

In PWM speed control, a fixed frequency square wave is applied to the speed control lead wire of the fan. The ratio of the on time vs. the PWM period is proportional to the RPM.

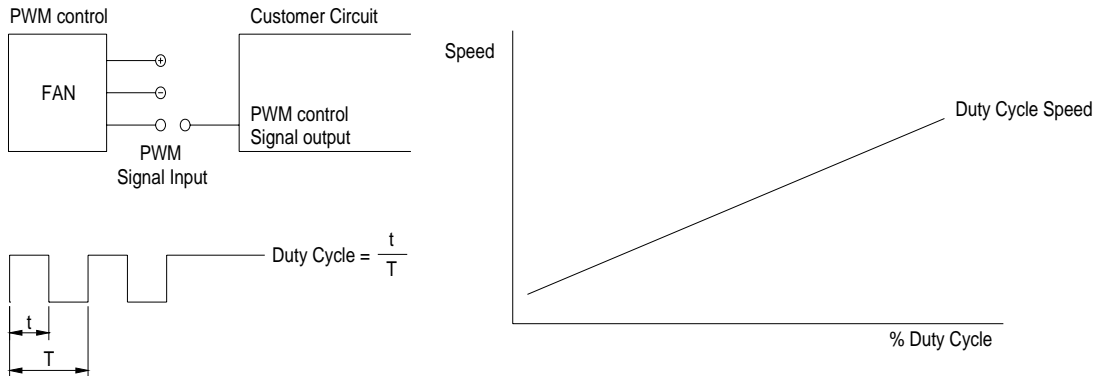

PWM INPUT VOLTAGE RANGE:

High level= 2.8 to 20 VDC
 Low level= 0 to 0.4 VDC


PWM INPUT CURRENT (IPWM) RANGE:

40uA to 20mA

To control signal line of the fan shall be able to accept a 30Hz to 30kHz.
 The preferred operating point for the fan is 0%~100% of duty cycle.



X.Fan Duty Cycle Vs RPM Curve

12025duty cycle vs rpm curv
 RPM

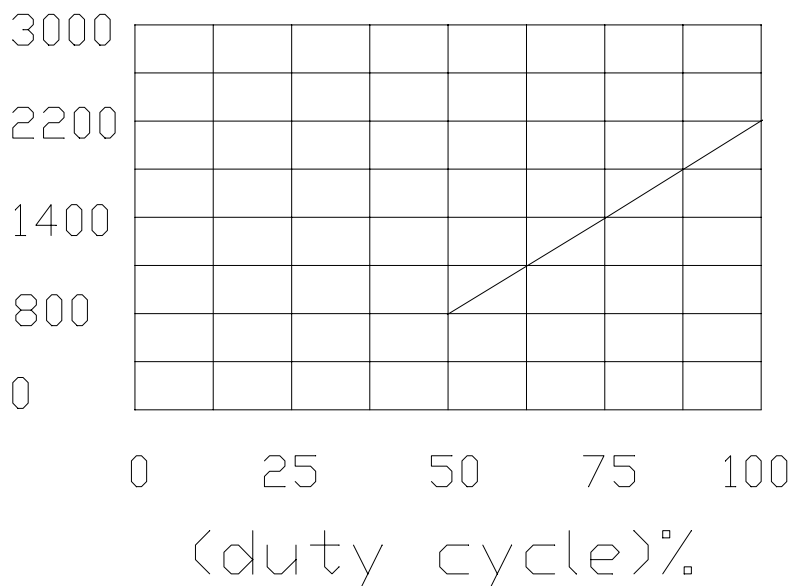


VIII. Sensor Curcuit System

Speed Sensor / Tachometer (FG/F)

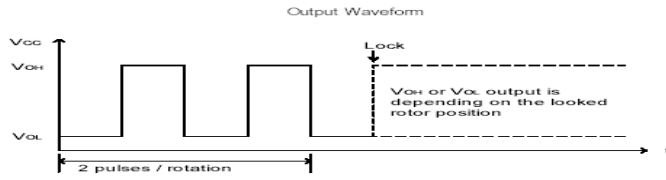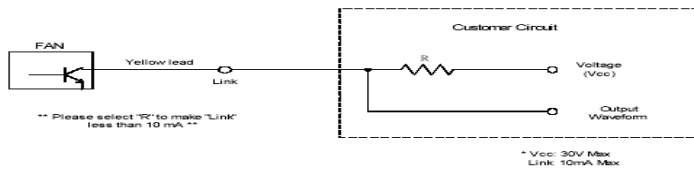

XI. P/Q Performance

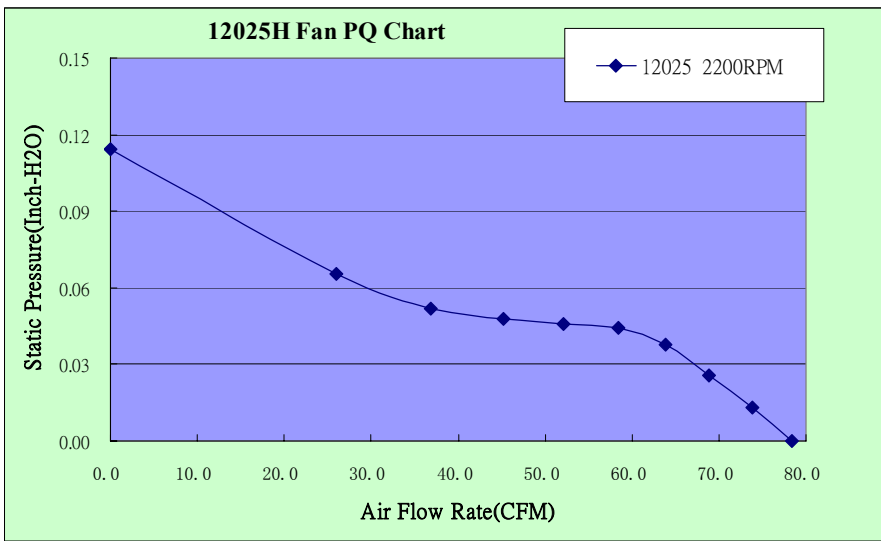

| 12025 2200RPM | | |
|---------------|--------|-------------|
| | Q(cfm) | Ps(InchH2o) |
| 1 | 0 | 0.114 |
| 2 | 25.947 | 0.065 |
| 3 | 36.887 | 0.052 |
| 4 | 45.266 | 0.048 |
| 5 | 52.16 | 0.046 |
| 6 | 58.356 | 0.044 |
| 7 | 63.922 | 0.038 |
| 8 | 68.917 | 0.026 |
| 9 | 73.87 | 0.013 |
| 10 | 78.407 | 0 |